



Introduction

The ActivFlo domestic BSP range of water conditioners offer maximum protection for fluid systems and their components against the buildup of limescale. Featuring ActivFlo's unique patented alloy coil, the unit uses a catalytic method of water treatment to change the calcium and bicarbonate ions to precipitate from the water forming an insoluble microscopic calcium carbonate crystal called aragonite, the smooth surface of this crystal cannot adhere to surfaces.

Features and Benefits:


- **No power supply required**
- **Life expectancy in excess of 20 years**
- **Suitable For whole house protection**
- ***15 year warranty**
- **Fit and forget installation**
- **Stainless steel housing**
- **Male BSP connection**
- **Helps to improve the efficiency of heating systems**

Product Range

Code	Description
AF012	1/2" Male BSP ActivFlo Water Conditioner
AF034M	3/4" Male BSP ActivFlo Water Conditioner
AF010	1" Male BSP ActivFlo Water Conditioner

Technical Specification

Maximum Operating Pressure	16 Bar
Maximum Operating Temperature	99°C
Inlet Connection Size	Male BSP

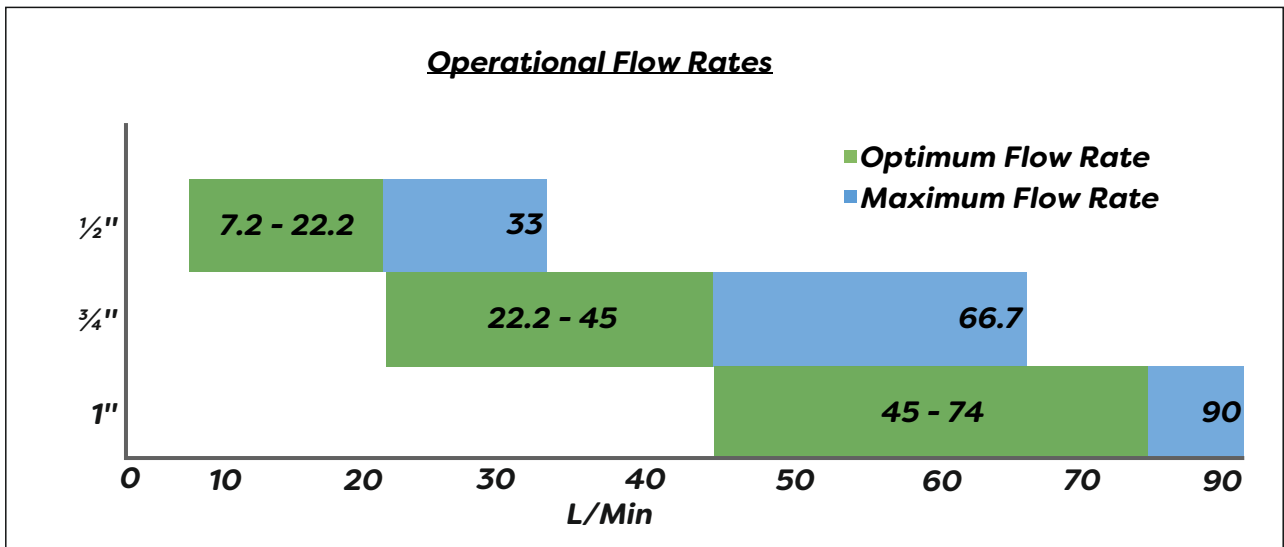

Dimensions

